


SINGLE-ROW DEEP GROOVE BALL BEARINGS

Bore Diameter 80 – 90 mm

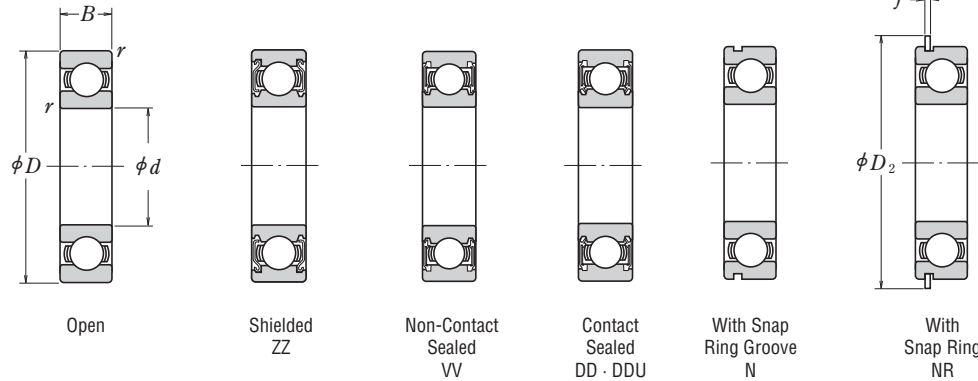

Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$\frac{f_0 F_a}{C_{0r}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

Boundary Dimensions (mm)	Basic Load Ratings (N)		Factor	Limiting Speeds (min ⁻¹)			Bearing Designations			With Snap Ring Groove	With Snap Ring Groove	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.					
	d	D		B	r min.	C _r	C _{0r}	f ₀	Grease			Oil	Open	Shielded	Sealed	a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _a (2) min.		D _a (2) max.	r _a max.	D _x min.	C _Y max.	
80	100	10	0.6	13 900	14 500	17.4	6 000	3 400	7 100	6816	ZZ	VV	DDU	N	NR	1.7	1.3	97.9	0.4	0.5	104.4	1.12	84	84.5	96	0.6	106	2.5	0.151
	110	16	1	27 400	24 000	16.6	5 600	3 200	6 700	6916	ZZ	VV	DDU	N	NR	2.5	1.3	107.6	0.4	0.5	115.7	1.12	85	87.5	105	1	117	3.3	0.391
	125	14	0.6	35 000	29 600	16.4	5 300	—	6 300	16016	—	—	—	—	—	—	—	—	—	—	—	—	84	—	121	0.6	—	—	0.621
	125	22	1.1	52 500	40 000	15.6	6 300	3 200	7 100	6016	ZZ	VV	DDU	N	NR	2.87	3.1	120.22	0.6	0.5	134.7	2.82	86.5	91	118.5	1	136.5	5.3	0.872
	140	26	2	80 000	53 000	14.6	5 300	3 000	6 300	6216	ZZ	VV	DDU	N	NR	4.90	3.1	135.23	0.6	0.5	149.7	2.82	89	95.5	131	2	152	7.3	1.42
	170	39	2.1	135 000	86 500	13.3	4 500	2 800	5 600	6316	ZZ	VV	DDU	N	NR	5.69	3.5	163.65	0.6	0.5	182.9	3.1	91	104.5	159	2	185	8.4	3.67
85	110	13	1	20 600	20 000	17.1	5 600	3 200	6 700	6817	ZZ	VV	DDU	N	NR	2.10	1.3	107.6	0.4	0.5	115.7	1.12	90	90.5	105	1	117	2.9	0.263
	120	18	1.1	35 000	29 600	16.4	5 300	3 000	6 300	6917	ZZ	VV	DDU	N	NR	3.30	1.3	117.6	0.4	0.5	125.7	1.12	91.5	94.5	113.5	1	127	4.1	0.55
	130	14	0.6	36 000	31 500	16.5	5 000	—	6 000	16017	—	—	—	—	—	—	—	—	—	—	—	—	89	—	126	0.6	—	—	0.652
	130	22	1.1	54 500	43 000	15.8	6 000	3 000	7 100	6017	ZZ	VV	DDU	N	NR	2.87	3.1	125.22	0.6	0.5	139.7	2.82	91.5	96	123.5	1	141.5	5.3	0.918
	150	28	2	92 500	62 000	14.5	4 800	2 800	6 000	6217	ZZ	VV	DDU	N	NR	4.90	3.1	145.24	0.6	0.5	159.7	2.82	94	102	141	2	162	7.3	1.76
	180	41	3	146 000	97 000	13.3	4 300	2 600	5 000	6317	ZZ	VV	DDU	N	NR	5.69	3.5	173.66	0.6	0.5	192.9	3.1	98	110.5	167	2.5	195	8.4	4.28
90	115	13	1	20 900	21 000	17.2	5 300	3 000	6 300	6818	ZZ	VV	DDU	N	NR	2.10	1.3	112.6	0.4	0.5	120.7	1.12	95	95.5	110	1	122	2.9	0.276
	125	18	1.1	36 000	31 500	16.5	5 000	2 800	6 000	6918	ZZ	VV	DDU	N	NR	3.30	1.3	122.6	0.4	0.5	130.7	1.12	96.5	98.5	118.5	1	132	4.1	0.585
	140	16	1	45 500	39 500	16.3	4 800	—	5 600	16018	—	—	—	—	—	—	—	—	—	—	—	—	95	—	135	1	—	—	0.873
	140	24	1.5	64 000	50 000	15.6	5 600	2 800	6 300	6018	ZZ	VV	DDU	N	NR	3.71	3.1	135.23	0.6	0.5	149.7	2.82	98	103	132	1.5	152	6.1	1.19
	160	30	2	106 000	71 500	14.5	4 500	2 600	5 600	6218	ZZ	VV	DDU	N	NR	4.90	3.1	155.22	0.6	0.5	169.7	2.82	99	107.5	151	2	172	7.3	2.18
	190	43	3	157 000	107 000	13.3	4 000	2 400	4 800	6318	ZZ	VV	DDU	N	NR	5.69	3.5	183.64	0.6	0.5	202.9	3.1	103	117	177	2.5	205	8.4	4.98

Notes (1) For tolerances of snap ring grooves and snap ring dimensions, refer to Pages A116 to A119.
 (2) When heavy axial loads are applied, d_a and D_a can be adjusted up to the shoulder diameter of the races. Please consult NSK for details.

Remarks 1. Diameter Series 7 (extra-thin wall) bearings are also available; please contact NSK for details.
 2. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.
 3. Please consult NSK about the snap ring groove dimensions of Dimension Series 18 and 19 sealed and shielded bearings when the diameter is 50 mm or more.